

# Guida SD Designed For Social Distancing

Job/Location: \_\_\_\_\_

Contractor: \_\_\_\_\_ Prepared By: \_\_\_\_\_

Model Number: \_\_\_\_\_ Date: \_\_\_\_\_



## EXTERNAL SPECIFICATIONS

The **GUIDA SD** features a universal social distancing icon that is immediately recognizable. Custom variations of the sign are available.

## EDGE-LIT DESIGN

The **GUIDA SD** series of elegantly designed edge-lit signs feature a clean and contemporary look. The design brings style and flexibility to your next prestigious exit sign application. The indirect LED illumination evenly lights the acrylic face with crisp, even light. The wide variety of finishes and mounting configurations available will ensure that the **GUIDA SD** can be easily matched to your decor.

## ORDERING INFORMATION

Series	Operation	Light Source	LED Colour	Face #	Mounting	Special Wording	Options
GD-SD	*Blank (AC only)	L (LED)	B (Blue)	1 (Single)	RC (Recessed ceiling)	SW-SD (6ft apart)	BA (Brushed aluminum finish)
			G (Green)	2 (Double)	SC (Surface ceiling)	SW-FC (Face covering)	PK12 (12" pendant kit)
					SW (Surface wall)		**120VDC (Specify 2 or 4 wires)
					SE (Surface end wall)		FL (Flashing Alarm)
					RW (Recessed wall)		IF (Inverted Face)

NOTES: \*\*120/347VAC, 120VAC line cord is standard, back entry. DC input available. Please consult factory      \*\*With 120VAC only


Example: GD-SD-L-B-1-RC-SW-SD

Description: Guida social-distancing sign, AC only, LED, blue colour, single face, recessed ceiling mount, special wording - 6ft apart




SOCIAL DISTANCING SIGNS

**DIMENSION (MM, IN.)**

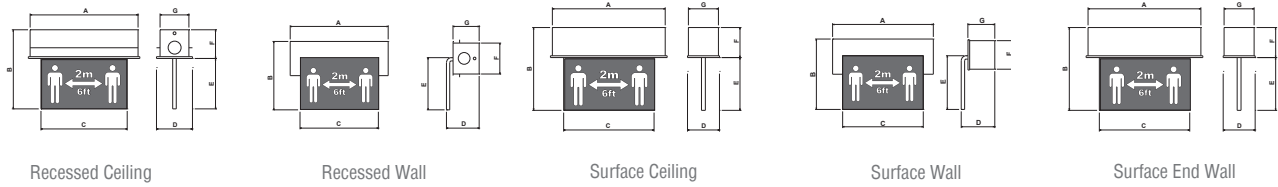

Model	A	B	C	D	E	F	G
Rec. Ceiling	14" (356mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4 1/4" (108mm)
Rec. Wall	14" (356mm)	10 1/2" (267mm)	12" (305mm)	6" (152mm)	8" (203mm)	4" (102mm)	4" (102mm)
Surf. Ceiling	14 1/4" (362mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4 1/4" (108mm)
Surf. Wall	14 1/4" (362mm)	10" (254mm)	12" (305mm)	6" (152mm)	8" (203mm)	4" (102mm)	4 1/4" (108mm)
Surf. End Wall	14 1/4" (362mm)	11 1/4" (286mm)	12" (305mm)	5" (127mm)	7" (178mm)	4 1/4" (108mm)	4" (102mm)



**INSTALLATION**

Universal mounting pattern and key hole slots are stamped into the housing providing various mounting options. Ceiling recessed versions are supplied standard with removable steel T-bar ceiling tile mounting brackets. All trim plates are supplied standard with an attractive and durable white, baked powder coat finish. Recessed version faceplates are held securely in place with two [2] torsion spring clips that allows the faceplate to accommodate uneven or angled ceilings and walls. The **GUIDA SD** is suitable for recessed and surface ceiling or wall mounting. Suitable for indoor installations.

Trim and faceplate mount into backbox for quick and easy installation.

**STANDARD PICTOGRAMS**



SOCIAL DISTANCING SIGNS