

Ottica SD Designed For Social Distancing

Job/Location: _____

Contractor: _____ Prepared By: _____

Model Number: _____ Date: _____



EXTERNAL SPECIFICATIONS

The **OTTICA SD** features a universal social distancing icon that is immediately recognizable. Custom variations of the sign are available.

ORDERING INFORMATION

| Series | Operation | Light Source | LED Colour | Mounting (Surface) | Face # | Special Wording | Options |
|--------|------------------|--------------|------------|---------------------|------------|-----------------------|-------------------------------|
| OT-SD | *Blank (AC only) | L (LED) | B (Blue) | WC (Wall & Ceiling) | 1 (Single) | SW-SD (6ft apart) | BA (Brushed aluminum finish) |
| | | | G (Green) | E (End) | 2 (Double) | SW-FC (Face covering) | PA (Polished aluminum finish) |
| | | | | | | | IF (Inverted face) |


NOTE: *120/347VAC, 120VAC line cord is standard, back entry. DC input available. Please consult factory

Example: OT-SD-L-B-WC-1-SW-SD

Description: Ottica edge-lit social-distancing sign, AC only, LED, blue colour, single face, wall & ceiling mount, special wording - 6ft apart

SOCIAL DISTANCING SIGNS

DIMENSION (MM, IN.)

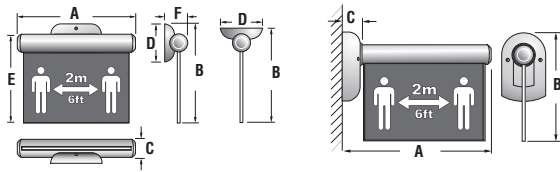

Wall & Ceiling Mount

End Mount

| Model | A | B | C | D | E | F |
|---------|-----------------|------------------|-----------|----------------|------------|-----------|
| Wall | 12 1/2" (318mm) | 10 9/50" (259mm) | 2" (51mm) | 4 1/2" (114mm) | 9" (229mm) | 3" (76mm) |
| Ceiling | 12 1/2" (318mm) | 10 3/20" (258mm) | 2" (51mm) | 4 1/2" (114mm) | 9" (229mm) | N/A |
| End | 14 1/2" (368mm) | 10" (254mm) | 2" (51mm) | N/A | N/A | N/A |

MODERN DESIGN

The **OTTICA SD** series of cylindrical designed edge-lit egress signs feature a radical, high-tech look. The design lends cutting edge technology and style to today's modern interior applications. The one-piece cylindrical body is extremely rigid and holds all of the LED circuitry in precision formed mounting channels. The indirect LED illumination provided by this design evenly lights the acrylic face with crisp, even light. A wide variety of finishes and mounting configurations available will ensure that the **OTTICA SD** can be suited to your installation.

MECHANICAL SPECIFICATIONS

The **OTTICA SD** cylindrical housing is constructed of sturdy extruded aluminum. All mounting channels are extruded with the housing at the time of manufacture, adding to the rigidity of the sign. The housing end caps are machined from solid aluminum and secured to the housing with a centered screw. The **OTTICA SD** canopy is made from die-cast aluminum and is attached to the housing at the factory to provide the most secure mounting possible. The **OTTICA SD** is supplied standard with a durable white, baked powder coat finish.

INSTALLATION

The **OTTICA SD** is suitable for wall & ceiling (includes sloped ceiling) or end mounting. Suitable for indoor installations.

STANDARD PICTOGRAMS

